


Geometric Boundaries II

*Interpretation and Application
of Geometric Dimensioning and Tolerancing
(Using the Inch and Metric Units)
Based on ASME Y14.5-2009 (R2004)*

Written and Illustrated by
Kelly L. Bramble

Published by:
Engineers Edge
510 N. Crosslane Road
Monroe, Georgia 30656
www.engineersedge.com

Copyright © All Rights Reserved

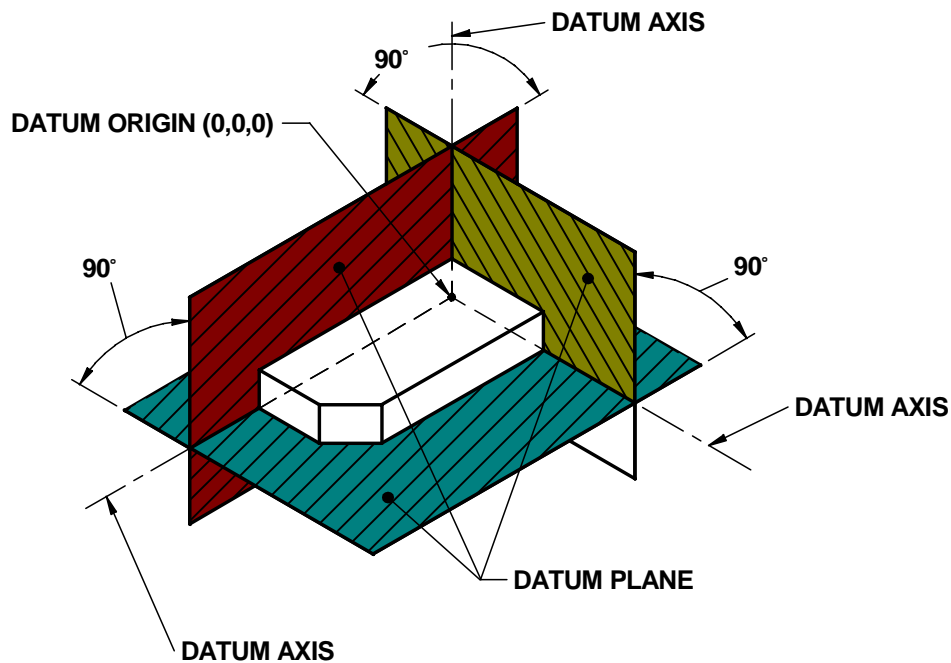

Preface

This book is written for those individuals within the design, drafting, engineering and manufacturing fields that desire a practical guide for the interpretation and application of geometric dimensioning and tolerancing.

I have deliberately directed my efforts for technical professionals applying geometric dimensioning and tolerancing and attempted to comprehensively cover the concepts and applications that are and will be the most relevant within industry today and the future. The choice of examples are those which represent typical applications and may be combined as applicable to create products.

Much of the text material has been organized so that the topics appear and build the necessary knowledge required to proceed to the next subject matter.

Kelly L. Bramble

Copyright 2009 All right reserved. No part of this book may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or any information storage and retrieval system, without permission in writing from the publisher.

Revision A

Acknowledgments

The following documents have been used as reference material (cited and not cited).

Engineers Edge 2000 - 2009, Solutions by Design – www.engineersedge.com
Design for Manufacturing 2006 - 2009, Kelly Bramble
Geometric Boundaries Based on ASME Y14.5M-1994
Geometrical Boundaries Based on ISO 1101(E) 2004, Kelly Bramble
ANSI/ASME B94.6-1984 (R2003), Knurling
ANSI B4.2-1978 (R2004), Preferred Metric Limits and Fits
ASME Y14.5-2009, Dimensioning and Tolerancing.
ASME Y14.5.M-1994, Dimensioning and Tolerancing
ISO/R1101 (E)-2004, & Associated Documents
ANSI B4.2-1978, Preferred Metric Limits and Fits
ANSI B5.10-1981, Machine tapers – Self Holding and Steep Taper Series
ANSI/ASME B46.1-1985, Surface Texture (Surface Roughness, Waviness, and Lay)
ANSI B89.3.1-1972, Measurement of Out-of-Roundness
ANSI/ASME B89.6.2-1973 (R2003), Temperature and Humidity Environment for Dimensional Measurement
ANSI B92.1-1970, Involute Splines and Inspection, Inch Version
ANSI B92.2M-1980, Metric Module, Involute Splines
ANSI/ASME B94.6-1984, Knurling
ANSI B94.11M-1979, Twist Drills
ANSI Y14.1-1980, Drawing Sheet Size and Format
ASME Y14.1M-2005, Metric Drawing Sheet Size and Format
ASME Y14.2M-1992, Line Conventions and Lettering
ASME Y14.2-2008, Line Conventions and Lettering
ASME Y14.5.1M-1994, Mathematical Definition of Dimensioning and Tolerancing Principles.
ANSI Y14.6aM-1981 (R1998), Screw Thread - Representation (Metric Supplement)
ANSI Y14.6.1-1978, Screw Thread Representation
ANSI Y14.6.2-1981, Screw Thread Representation (Metric Supplement)
ANSI Y14.7.1-1971, Gear Drawing Standards – Part 1: For Spur, Helical, Double Helical, and Rack
ANSI Y14.7.2-1978, Gear and Spline Drawing Standard – Part 2: Bevel and Hypoid Gears
ASME Y14.8M-1989, Castings and Forgings
ANSI Y14.36-1978, Surface Texture Symbols
ANSI/IEEE 268-1992, Metric Practice
ANSI/ASME B1.2-1983, Gages and Gaging for Unified Inch Screw Threads
ANSI B4.4M-1981 (R1987), Inspection of Workpieces
ASME B5.10-1994, Machine Tapers — Self Holding and Steep Taper Series
ASME Y1.1-1989, Abbreviations

Acknowledgments Continued

The following documents have been used as reference material (cited and not cited).

ASME Y14.3M-1994, Multiview and Sectional View Drawings

ASME Y14.41-2003 (R2008), Digital Product Definition Data Practices

ASME Y14.43-2003 (R2008), Dimensioning and Tolerancing Principles for Gages and Fixtures

IEEE/ASTM SI 10-2002 ERRATA 2005, Standard for Use of the International System of Units (SI) — The Modern Metric System

Table of Contents

- 1.2 Preface
- 1.3 Acknowledgments
- 1.4 Table of Contents
- 1.10 Introduction
- 1.11 How the Geometric Dimensioning and Tolerancing System Works
- 1.12 Tolerances, Features and Characteristics
- 1.13 Feature Control Frame, Rule #2
- 1.14 Position and Limit Tolerance General Overview and Contrast
- 1.15 Common Symbols ASME Y14.5 - 2009
- 1.16 Dimensioning and Tolerancing General Rules
- 2.1 Limit Tolerancing**
- 2.2 General – Dimensioning System Limit Tolerancing
- 2.3 Limit tolerancing, Square Tolerance Zone and Overview
- 2.4 Tolerance Application and Method
- 2.5 Implied 90 Degree Angle, Dimensional Expression
- 2.6 Dimension and Tolerance Expression – Millimeter Tolerances and Dimensions
- 2.8 Inch Tolerances and Dimensions
- 2.10 Angular Dimensioning and Tolerancing
- 2.11 Slotted holes, Arcs, Countersink hole
- 2.12 Counter bored Holes, Countersink on curved surface
- 2.13 Internal External Chamfers, Keyseats
- 2.14 Rectangular Coordinate Dimensioning
- 2.15 Rectangular Coordinate Dimensions in Tabular Form, Polar Dimensioning
- 2.16 Repetitive Features
- 2.17 Flat Taper, Conical Taper
- 2.18 Statistical Tolerancing
- 2.19 Dimension Origin, Screw Threads Tolerance Application
- 2.20 Angular Surface Defined by Limit and Angle Dimension
- 2.21 Gears and Splines, Controlled Radius, Radius Tolerance
- 2.22 Knurling, Rods and Tubing Specification, Surface Roughness or Texture
- 2.23 Features With and Without Size
- 2.24 Material Condition, MMC, MMB LMC, LMB
- 2.25 Rule #1, Envelope Principle
- 2.26 Exceptions to Rule #1, Independency Application
- 2.27 Continuous Feature
- 2.28 Limitation of the Limits of Size
- 3.1 Datums**
- 3.2 Datum Reference Frame, DRF - General
- 3.3 Immobilization of component and measurement
- 3.4 Datum identification General
- 3.5 Datum symbols and identification Datum identification features without size
- 3.6 Datum identification features with size
- 3.7 Datum Identification Features with Size Alternative and Special Applications
- 3.8 Datum associated with feature control frame
- 3.9 Datum feature, simulated datum, and theoretical datum plane
- 3.10 Primary External Datum Diameter
- 3.11 Primary internal Datum Diameter
- 3.12 Primary External Datum Width

Table of Contents

- 3.13 Primary Internal Datum Width
- 3.14 Primary Datum Features Reference
- 3.15 Setup and Inspection of Datum's, Datum and Dimensional Measurement equipment
- 3.17 Sequence of Datum Features
- 3.18 Sequence of Datum Features Relates Part to Datum Reference Frame
- 3.19 Cylindrical Datum Feature
- 3.20 Parts with Angular Orientation
- 3.22 Orientation of Two Datum Planes Through Hole Features
- 3.24 Datum reference Frame With Translation Modifier
- 3.26 Partial Datum Surface(s) as Datum Features
- 3.27 Partial Contoured Datum Surface
- 3.28 Multiple Datum Features, Single Datum
- 3.29 Planar Multiple Datum Features Offset
- 3.30 Contoured Datum Feature Constraining a Rotational Degree of Freedom, Contoured Datum Feature at MMB
- 3.31 Planar Datum Feature Constraining Rotational Degree of Freedom
- 3.32 Conical Datum Feature Constraining a Rotational Degree of Freedom
- 3.33 Conical Datum Feature Constraining Rotational Degree of Freedom With secondary Datum Constraint
- 3.34 Inclined Datum Features
- 4.1 **Datum Targets**
- 4.2 General
- 4.3 Datum Target Point Symbol, Application
- 4.4 Datum Target Area
- 4.5 Datum Target Line
- 4.6 Dimensioning Datum Targets
- 4.7 Primary Datum Plane Established by Three Datum Target Areas
- 4.8 Primary Datum Plane Established by Two Datum Target Points and One Datum Target Line.
- 4.9 Step Datum Feature
- 4.10 Datum Target Lines and Areas
- 4.11 Primary Datum Axis Established by Datum Target points on a Single Cylindrical Feature
- 4.12 Equalizing Datum
- 4.14 Secondary Datum Axis
- 4.15 Spherical Movable Datum Target
- 5.1 **Form**
- 5.2 General
- 5.3 Flatness
- 5.4 Flatness Applied on a Unit Basis
- 5.5 Flatness Applied on Unit Basis With Overall Control
- 5.6 Flatness Applied to Derived Median Plane at RFS
- 5.7 Flatness Applied to Derived Median Plane at MMC
- 5.8 Straightness
- 5.9 Straightness Per Unit Basis
- 5.10 Straightness Applied in Two Directions
- 5.11 Straightness of a Surface (Cylindrical)
- 5.12 Straightness of a Feature of Size @ RFS
- 5.13 Straightness of a Feature of Size @ MMC
- 5.14 Straightness Per Unit Length With Specified Total Straightness
- 5.15 Cylindricity
- 5.16 Circularity (Roundness)
- 5.17 Circularity of Cone

Table of Contents

6.1	Tolerance of Orientation	7.10	Internal Feature of Size Position Tolerance Boundaries with Maximum Material Condition MMC Specification and Datum's at RMB
6.2	General - Overview	7.11	External Feature of Size Position Tolerance Boundaries with Least Material Condition LMC Specification and Datum's at RMB
6.3	Perpendicularity - Surface	7.12	Internal Feature of Size Position Tolerance with Least Material Condition LMC Specification and Datum's at RMB
6.4	Perpendicularity – Surface Two Datum's	7.13	Zero Positional Tolerance at MMC, Datum's at RMB
6.5	Perpendicularity – Center plane	7.14	Position Tolerance at RFS and Datum's at RFB
6.6	Perpendicularity at MMC Internal Feature – Center Plane	7.15	Positional Tolerance at MMC Surface and Axis Interpretation of a Hole Feature
6.7	Perpendicularity – External Feature of Size Axis	7.16	Positional Tolerance Axis and Surface Interpretation – Surface Datum's
6.8	Perpendicularity – Internal Feature of Size Axis	7.17	Positional Tolerance Axis Interpretation - Surface Datum's
6.9	Perpendicularity –Threaded Hole or Inserts Projected Tolerance Zone	7.18	Positional Tolerance Surface Interpretation - Surface Datum's
6.10	Parallelism	7.19	Positional Tolerance Axis and Surface Interpretation - Thru Hole Datum's
6.11	Parallelism Control of Two Hole Features	7.20	Positional Tolerance Axis Interpretation – Thru Hole Datum's
6.12	Parallelism Hole Relative to Plane	7.21	Positional Tolerance Surface Interpretation – Thru Hole Datum's
6.13	Angularity Overview and Surface to Surface	7.22	Rectangular Coordinate Method
6.14	Angularity Surface to Surface with Location Control	7.23	Positional Tolerance at MMC Relative to Hole and Slot Datum Feature
6.15	Angularity Hole to Planar Datum	7.24	Bi-Directional Positional Tolerancing, Polar Coordinate Method
7.1	Tolerances of Location	7.25	Different Positional Tolerance at Each Surface
7.3	General		
7.4	Fundamental Explanation of Positional Tolerancing		
7.5	Differences Between Position Tolerancing and Limit Tolerancing		
7.6	Modifiers		
7.7	Maximum Material Condition and Boundary		
7.8	Least Material Condition and Boundary		
7.9	External Feature of Size Position Tolerance Boundaries with Maximum Material Condition MMC Specification and Datum's at RMB		

Table of Contents

7.26	Circular pattern of holes	8.3	Profile of surface, Bilateral tolerance
7.27	Positional Tolerance at MMC Relative to Datum Feature Center Planes	8.4	Profile of Surface, Bilateral Tolerance Rectangular Coordinate Dimensioning Without Dimension Lines
7.28	Positional Tolerance at RFS of Slots Relative to Surface Datum Features	8.4	Profile of Surface, Unilateral (INSIDE) Tolerance
7.29	Coaxial (Concentric) Control of Cylinders	8.5	Profile of surface, unilateral (Outside) tolerance
7.30	Coaxial (Concentric) Control of Multiple Hole-Counterbore Holes	8.6	Profile of Surface, Unilateral (OUTSIDE) Tolerance
7.31	Coaxial Control of Cylinders	8.7	Profile of Surface, Bilateral Unequal Tolerance
7.32	Hole Pattern Located Perpendicular to Cylindrical Datum	8.8	Profile of Surface, All Around
7.33	Holes Not Normal to DRF	8.9	Profile of Surface, Independent Form Control
7.34	Hole Pattern Located at Angle to Datum Reference Frame	8.10	Profile of Surface, Boundary Principle
7.35	Positional Tolerance at MMC of Spherical Feature	8.10	Profile Tolerance for Coplanar Surfaces
7.36	Positional Tolerance of Coaxial Holes of Same Size	8.12	Profile of Line
7.37	Least Material Condition Application – Cylinder Wall Thickness	8.13	Profile of Line Tapered Shape
7.38	Positional Tolerance for Coaxiality With Datum Feature referenced at MMB	8.14	Profile of Line and Size Control
7.39	Positional Tolerance for Coaxially With Feature Referenced at Zero MMC Relative to Datum Feature at MMB	8.15	Composite Profile Tolerances
7.40	Positional Tolerance - Thru Hole Datum's at MMC	9.1	Runout
7.41	Positional Tolerance - Thru Hole Datum Verification	9.2	General
7.42	Composite Positional Tolerancing	9.3	Circular Runout
7.45	Concentricity	9.4	Total Runout
7.47	Concentricity Application	9.5	Run-Out With Plane as Datum
7.48	Symmetry	9.6	Run-Out Relative to Datum Surface and a Diameter
8.1	Profile	9.7	Run-Out With Two Datum Diameters
8.2	General	10.1	Coaxial Tolerance Comparison
		11.1	Tolerance Analysis
		11.2	Series Stack
		11.3	Floating Fastener Condition

Table of Contents

- 11.4 Fixed Fastener Condition
- 11.5 Tolerance Compensation for
Projected Tolerance Zone – Fixed
Fastener condition
- 11.7 Two Mating Coaxial/Coplanar
Features at MMC
- 11.8 Tolerance Compensation for
Projected Tolerance Zone
Fixed Fastener Condition
- 11.10 Three Mating Coaxial/Coplanar
Features at MMC
- 11.11 Position Tolerance calculation and
Hole Pattern Analysis
- 11.12 Position Tolerance Verification
- 11.13 Position Coordinate to Location
Conversion Chart

- 12.1 **Critical Feature Drawing
(Reduced Dimension Drawing)**
- 12.2 General
- 12.3 Implementation Considerations
Applicable Documents, Overview
- 12.4 Design Drawing Requirements
Digital Model and Database
- 12.5 Quality and Inspection
Requirements
Manufacturing
- 12.6 Change Notice Procedure

- 13.1 **Definitions and Terminology
(Glossary)**

- 14.1 **Symbol Comparison**
- 14.2 Comparison of ASME and ISO
Symbols (Geometric Characteristics)
- 14.3 Comparison of ASME and ISO
Symbols (General)

- Appendix A**
Principal Changes and Revisions
within ASME Y14.5-2009